

REACH YOUR CUSTOMERS WHATEVER THE WEATHER WITH THE TOPAZ OUTDOOR DISPLAY RANGE


Broadcasting your message and reaching customers should not be limited to internal applications, with our **OVSL Outdoor Range** we enable you to broadcast your message regardless of the weather.

High impact screens designed to house a small format media player of your choice you can now expand your network to external locations. Our commercial grade displays are IP65 rated and enable you to ensure your message is seen even in the brightest conditions with the ultra-high bright panels which are 5 times brighter than our indoor screens.



The TOPAZ Outdoor Solution

- Commercial Grade Digital Signage Screen
- Sealed storage for media player
- Fully Weather proofed IP65 enclosure
- Ultra High bright panel
- In-built ambient light sensor
- Wide operating temperature range

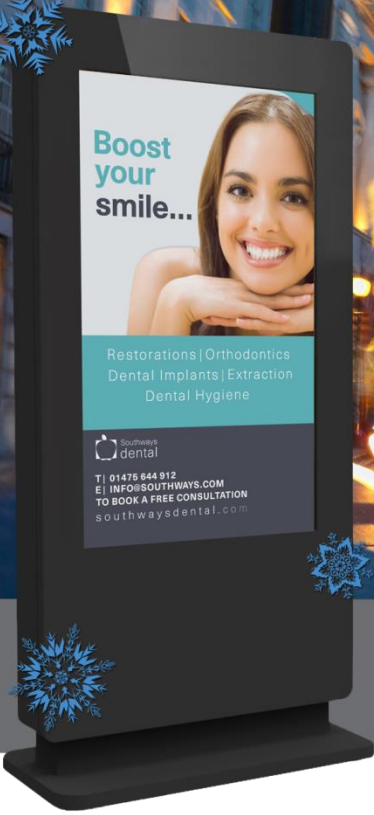

TOPAZ OUTDOOR FREESTANDING DISPLAYS
 TPZ-OVSL-49FS TPZ-OVSL-55FS
 TPZ-OVSL-65FS TPZ-OVSL-75FS



Sunlight Readable



24/7 Usage



Weatherproof



Wide Viewing Angle



Vandal Proof




Sealed Compartment

PRODUCT HIGHLIGHTS

SEALED COMPARTMENT

Perfect for housing your small form factor PC or Media Player, the TOPAZ Outdoor Display has a fully weather proof lockable compartment.




SUNLIGHT READABLE

Brightness is paramount when using outdoor screens, these displays use commercial grade Ultra High Brightness panels (2500 cd/m2); more than 8 times brighter than a standard home TV to allow easy readability in direct sunlight.



ANTI-REFLECTIVE GLASS

The glass frontage is also anti-reflective to help defuse direct sunlight shining on the display.



OUTDOOR ENCLOSURE


Designed with robust, corrosion protected, casing to protect against the elements and the public. With an IP65 rating, it keeps out all airborne particles as well as being protected from any wet weather conditions and also feature waterproof over moulded AV connectors.



TOPAZ OUTDOOR FREESTANDING DISPLAYS SPECIFICATIONS

	DISPLAY SIZE	49 INCH	55 INCH	65 INCH	75 INCH
PANEL	RESOLUTION	1080 x 1920	1080 x 1920	1080 x 1920	1080 x 1920
	DISPLAY AREA (MM)	604 x 1073	686 x 1215	803.5 x 1428	928 x 1650
	ASPECT RATIO	9:16	9:16	9:16	9:16
	BRIGHTNESS (CD/M2)	2500	2500	2500	2500
	COLOUR	1.06 B	1.06 B	1.06 B	16.7M
	VIEWING ANGLE	178°	178°	178°	178°
	CONTRAST RATIO	8000:1	8000:1	8000:1	8000:1
AV INPUTS	VIDEO	HDMI, VGA			
POWER	INPUT VOLTAGE	AC100-240V (50Hz-60Hz)			
MECHANICAL	UNIT SIZE (WXHXD MM)	870 x 1940 x 180	960 x 2020 x 200	Custom Build	
	NET WEIGHT (KG)	120	200	Custom Build	
	WORKING TEMPERATURE	-20°C - +50°C [Ability to operate to Minus 40 °C with additional heater]			
	OPERATING HUMIDITY	10% 80%			
	STORAGE TEMPERATURE	-30°C - 60°C			
	STORAGE HUMIDITY	5% - 90%			
ENCLOSURE PROTECTION	IP65				
ACCESSORIES	INCLUDED	AC Power Cable, Remote Control, HDMI Cable, Keys			

TPZ-OASL-49FS

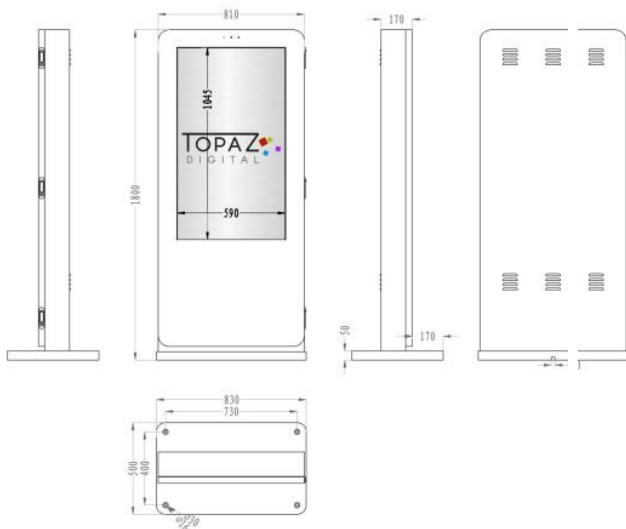

TPZ-OASL-55FS

